

ESBE T4 Pump Control Set



Underfloor heating with thermostatic mixing valve

Product Information

The ESBE compact T4 thermostatic 4 port pump set, comes complete with:


- 20°C - 55°C temperature range suited for force screed drying in accordance with (BS1264)
- "A" rated Wilo Para 25/6 SCU pump
- Integrated check valves for easy filling
- Temperature gauge
- Assembled in the UK; comes pre-tested packaged and ready for instant installation
- 2 Year warranty
- Fully reversible (Left or Right sided manifold)
- Side or bottom entry connections
- Available in 200mm, 210mm and 225mm manifold connection centers

Specification


Kv: 3.4Kv (18kW output)
 Temperature range: 20°C - 55°C
 Max temperature range:
 Continuously = 95°C / Temporarily = 100°C
 Maximum supply pressure: 10 Bar

Optional extras

Primary isolation valves
 Safety temperature switch
 Manifold isolation valves
 Compression fittings

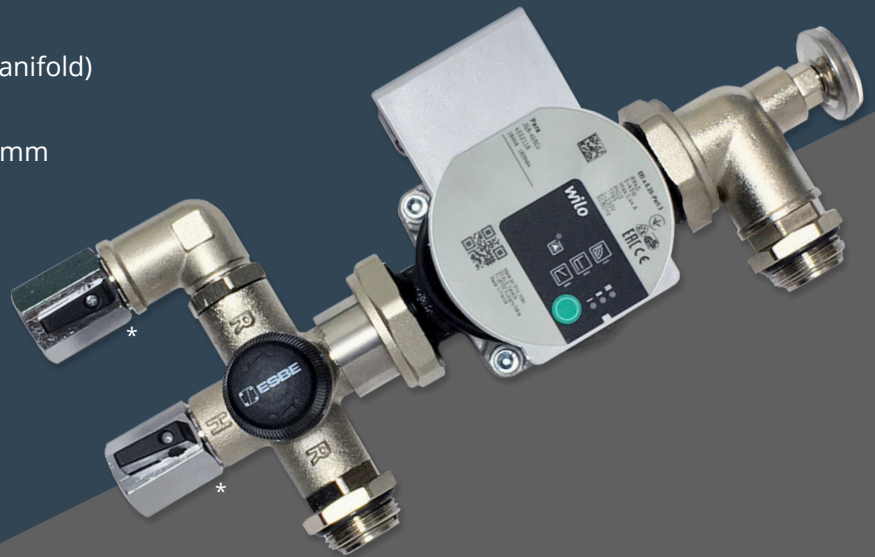

Item	Description	Qty
1	WILO 25/6-SCU Pump	1
2	ESBE Thermostatic Mixing Valve	1
3	Flow / Return Elbow	1
4	2mm Rubber Washer	2
5	1 1/2" Rapid Connection Nut	2
6	Elbow Flanged	1
7	3/4" Female BSP Flow and Return	2
8	3/8" Pocket	1
9	Temperature Gauge	1
R	Return from manifold / flow to heat source	NA
H	Flow from heat source	NA

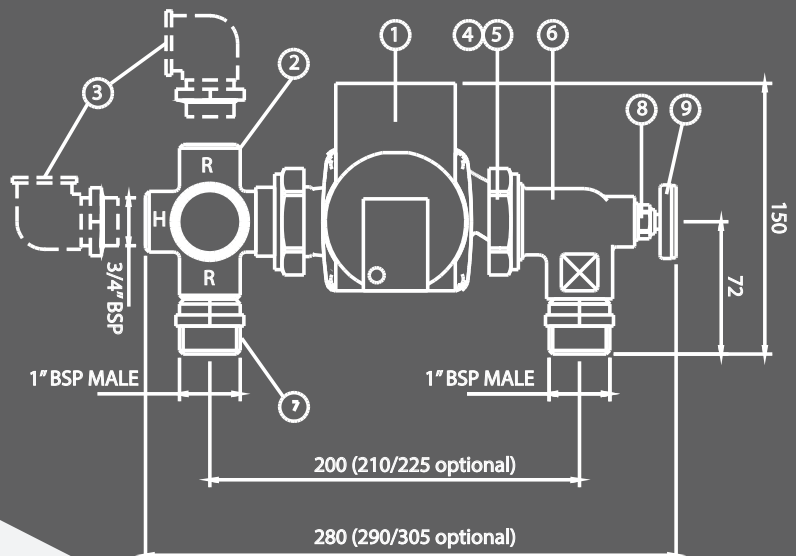

*Please note - Primary Isolation Valves are an optional extra.